

# Opera<sup>12</sup>



## INSTALLATION AND CONNECTION

**Recommended installation height** 6 in (15 cm).


**Clearances**

■ Front: 30 in (75 cm) ◀ Sides: 8 in (20 cm) ▲ Above: 8 in (20 cm) ▼ Underneath: 1 in (2,5 cm).

**Installation** Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.

**Connection** 240-V unit: Flexible cord connection, including junction box cover. Installation requires 2 in X 3 in wall box (not included).

**Note** 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

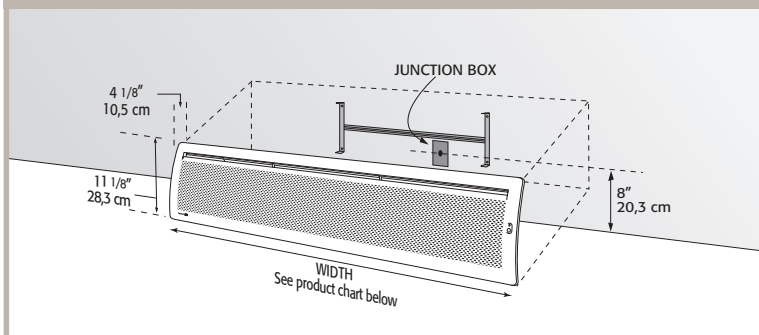

## HEATING ELEMENT

**Total capacity** 750 or 1 000 W

 **Radiant heat** Ribbed-high-emissivity monoblock element made of aluminum alloy.

**Thermal protection** Automatic reset overheat protection.

## TEMPERATURE CONTROL

 **Programmable electronic thermostat** Built-in electronic proportional-action thermostat ultraprecise to 1/5°F (1/10°C).

**Programmer Control** panel designed to accept the 7392 Programmer module.

## CONTROL PANEL

 **Location** On top right-hand side of the unit.

**Energy use** indicator.

**LCD backlit screen** with digital controls lockable by key combination.

**On/Off button** with indicator light.

**Mode button** with five settings: Comfort; Economy; Frost protection (45°F (7°C)); Program (programmed setback when connected to the Convectair Programmer); Absence detector (setback when absence detected).


**Open-window button** to activate open-window detection.

**Ideal °C button** optimizes energy consumption and restores default settings.

**<< + and - >> buttons** set the temperature and lock the controls.

**Heating** indicator light.


## CABINET

 **Steel** construction with polyester/epoxy anti-rust powder coating and resistant to UV rays.


**Cabinet** Convex casing with rounded corners.


**Grille** Perforated front panel for better radiant heat with absence detector.

**Colour FS** = Satin white

MODEL	Catalogue No.	Colour	Power		Height		Width		Depth		Net Weight	
			240 V	208 V	cm	in	cm	in	cm	in	kg	lb
OPERA <sup>12</sup>  	7732-C07	FS	750 W	565 W	28,3	11 1/8	105,7	41 5/8	10,5	4 1/8	5,5	12,1
	7732-C10	FS	1 000 W	750 W	28,3	11 1/8	116,2	45 3/4	10,5	4 1/8	6,1	13,4
	7731-C10	FS	1 000 W	750 W	28,4	11 1/8	106	41 3/4	9,9	4	6,1	13,4

Depth includes the mounting brackets.

 Compatible with the Programmer pilot-wire system (see technical specifications for catalogue number 7392).

 Control panel is designed to accept the 7392 Programmer module.

