

Approval Drawings

Piccolo Slim Profile Bathroom Fan Heater







FEATURES

Control

Color - White

Finish - Epoxy/polyester anti-rust powder coating resistant to UV rays

Voltage - 240 V, 1-phase

Wattage - Regular Power (standard) 750 W; Maximum Power (timer) 1,500 W

Construction - Steel cabinet featuring rounded corners and splash-proof construction for safe

installation in the bathroom

- Bottom air outlet directs the warm air downwards, towards the centre of the room

- High-limit temperature control that will turn the heater off in case of overheating, with

main power interruption reset

Fan - Quiet squirrel-cage fan

Factory-lubricated motor

- Tactory-lubricateu i

Heating Element - Nickel-chromium alloy stitched wire, providing instant heat

- Built-in electronic proportional-action digital thermostat, located on the front panel, for regulated heating

- Electronic timer, 5-90 minutes, with indicator light, for accelerated heating

- LCD backlit display with digital controls lockable by key combination

- Temperature display format (°C or °F)

- "On-Off" button with indicator light

- "24-hr" button with indicator light stores the "Chrono" mode setting,

for daily bathroom preheating

Heating indicator light

Installation - Recess mounting in 2" x 4" stud partitions with gypsum

- Direct connection to the power cable through a knock-out in the upper left corner


- Removable front panel for the installation

Warranty - 5-year heating element, 2-year parts and defects

Applications - Bathroom, entrance way

Approval Drawings

Piccolo Slim Profile Bathroom Fan Heater

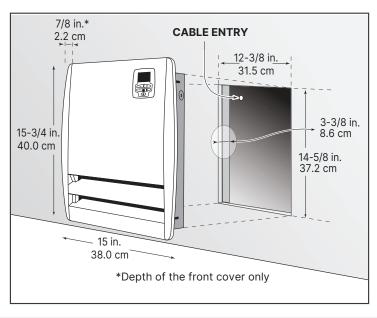

Product No.	QTY	UPC	VOLTS	WATTS	HEIGHT		WIDTH		DEPTH		WEIGHT	
Floudet No.					IN	СМ	IN	СМ	IN	СМ	LB	KG
Piccolo - WHITE												
X-7831-C15-BB		774725004079	240	Regular Power (standard) 750 W Maximum Power (timer) 1500 W	15-3/4	40.0	15	38.0	7/8*	2.2	12.4	5.6

Project Details

Project:	
Consulting Engineer:	
Electrical contractor:	
Distributor:	
Date:	
Contact at Glen Dimplex Americas:	Approval Information
Comments:	

1-800-668-6663 | convectair.ca