

Apero Convector

With a classic design and concentrated power in a single height, the Apero offers Convectair's signature comfort at an affordable price.



COLOR

- Standard: white
- Some models are also available in charcoal color

FINISH

- Standard: epoxy/polyester anti-rust powder coating resistant to UV rays

VOLTAGE

- 240/208V, 60 Hz, 1-phase

CONSTRUCTION

- Steel cabinet featuring rounded corners and grilles that prevent access to the heating element
- Front air outlet that directs warm air towards the centre of the room ❶
- High-limit temperature control with automatic reset

HEATING ELEMENT

- X-shaped, monoblock element made of surface-treated extruded aluminum ❷

CONTROL

- Built-in electronic proportional-action digital thermostat, ultra-precise to 1/10 °C (1/5 °F), located at the top of the unit ❸
- Digital controls lockable by key combination
- Temperature display format (°C or °F)
- "Mode" button to choose from Comfort, Economy, Frost Protection and Heat Off modes
- Heating indicator light
- "On-Off" button

WARRANTY

- 2-year warranty against defects
- 5-year warranty on the heating element


APPLICATION

- Kitchen, living room, home office, family room, bedroom, bay window



INSTALLATION

- Quick surface-mounted installation, with the included wall mounting bracket, that also serves as marking template
- Flexible cable with electrical wall box cover plate included
- Requires installation of a wall electrical box not supplied

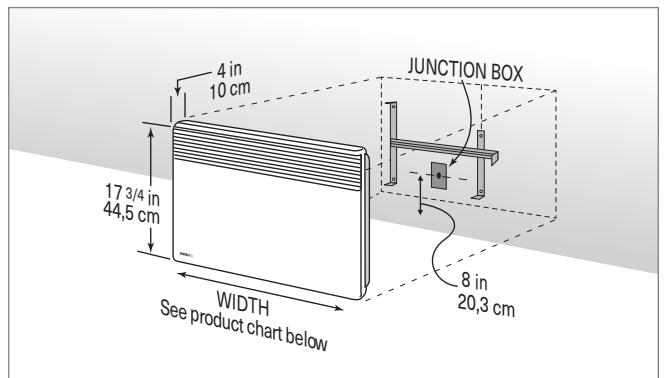

Recommended installation height	
in	cm
4	10.2

Minimum clearances							
Front		Side		Above		Below	
in	cm	in	cm	in	cm	in	cm
20	50.8	6	15.2	4	10.2	4	10.2

It is recommended that all units be installed by a licensed electrical contractor in accordance with national and local codes. Consult convectair.ca to find installation instructions for our heaters. Specifications, finishes and dimensions are subject to change. SE-630-R00-111221



2 year limited warranty
5-year element warranty

Apero Convactor

Apero											
Catalogue No.	Color	Power		Height		Width		Depth		Net Weight	
		240 V	208 V	cm	in	cm	in	cm	in	kg	lb
7359-C05	BB	500 W	375 W	44.5	17-3/4	34	13-3/8	10.2	4	3.1	6.9
7359-C07	BB HS	750 W	565 W	44.5	17-3/4	34	13-3/8	10.2	4	3.3	7.2
7359-C10	BB HS	1,000 W	750 W	44.5	17-3/4	42	16-1/2	10.2	4	3.7	8.1
7359-C12	BB	1,250 W	940 W	44.5	17-3/4	50	19-5/8	10.2	4	4.1	9.1
7359-C15	BB HS	1,500 W	1,125 W	44.5	17-3/4	58	22-7/8	10.2	4	4.8	10.7
7359-C17	BB	1,750 W	1,315 W	44.5	17-3/4	66	26	10.2	4	5.3	11.7
7359-C20	BB HS	2,000 W	1,500 W	44.5	17-3/4	74	29-1/8	10.2	4	5.9	13.1
7359-C28	BB	N/A	2,000 W	44.5	17-3/4	74	29-1/8	10.2	4	5.9	13.1

BB=White, HS=Charcoal

Depth includes the mounting brackets.



It is recommended that all units be installed by a licensed electrical contractor in accordance with national and local codes. Consult convectair.ca to find installation instructions for our heaters. Specifications, finishes and dimensions are subject to change. SE-630-R00-111221



2 year limited
warranty
5-year element
warranty